


**FRTW IN-USE**

**1** UL DESIGN NO. V314 

- A** 5/8" Type X gypsum board
- B** 5/8" Type X gypsum board
- C** PyroGuard™ framing lumber, 2x4 or greater
- D** Mineral wool or fiberglass insulation
- E** 15/32" PyroGuard™ plywood

**2** EXTERIOR WALL SYSTEMS (EWS0045) 

- A** 5/8" Type X gypsum board
- B** 5/8" Type X gypsum board
- C** PyroGuard™ framing lumber, 2x4 or greater
- D** Mineral wool or fiberglass insulation
- E** 15/32" PyroGuard™ plywood
- F** Water resistive barrier
- G** Exterior wall finish

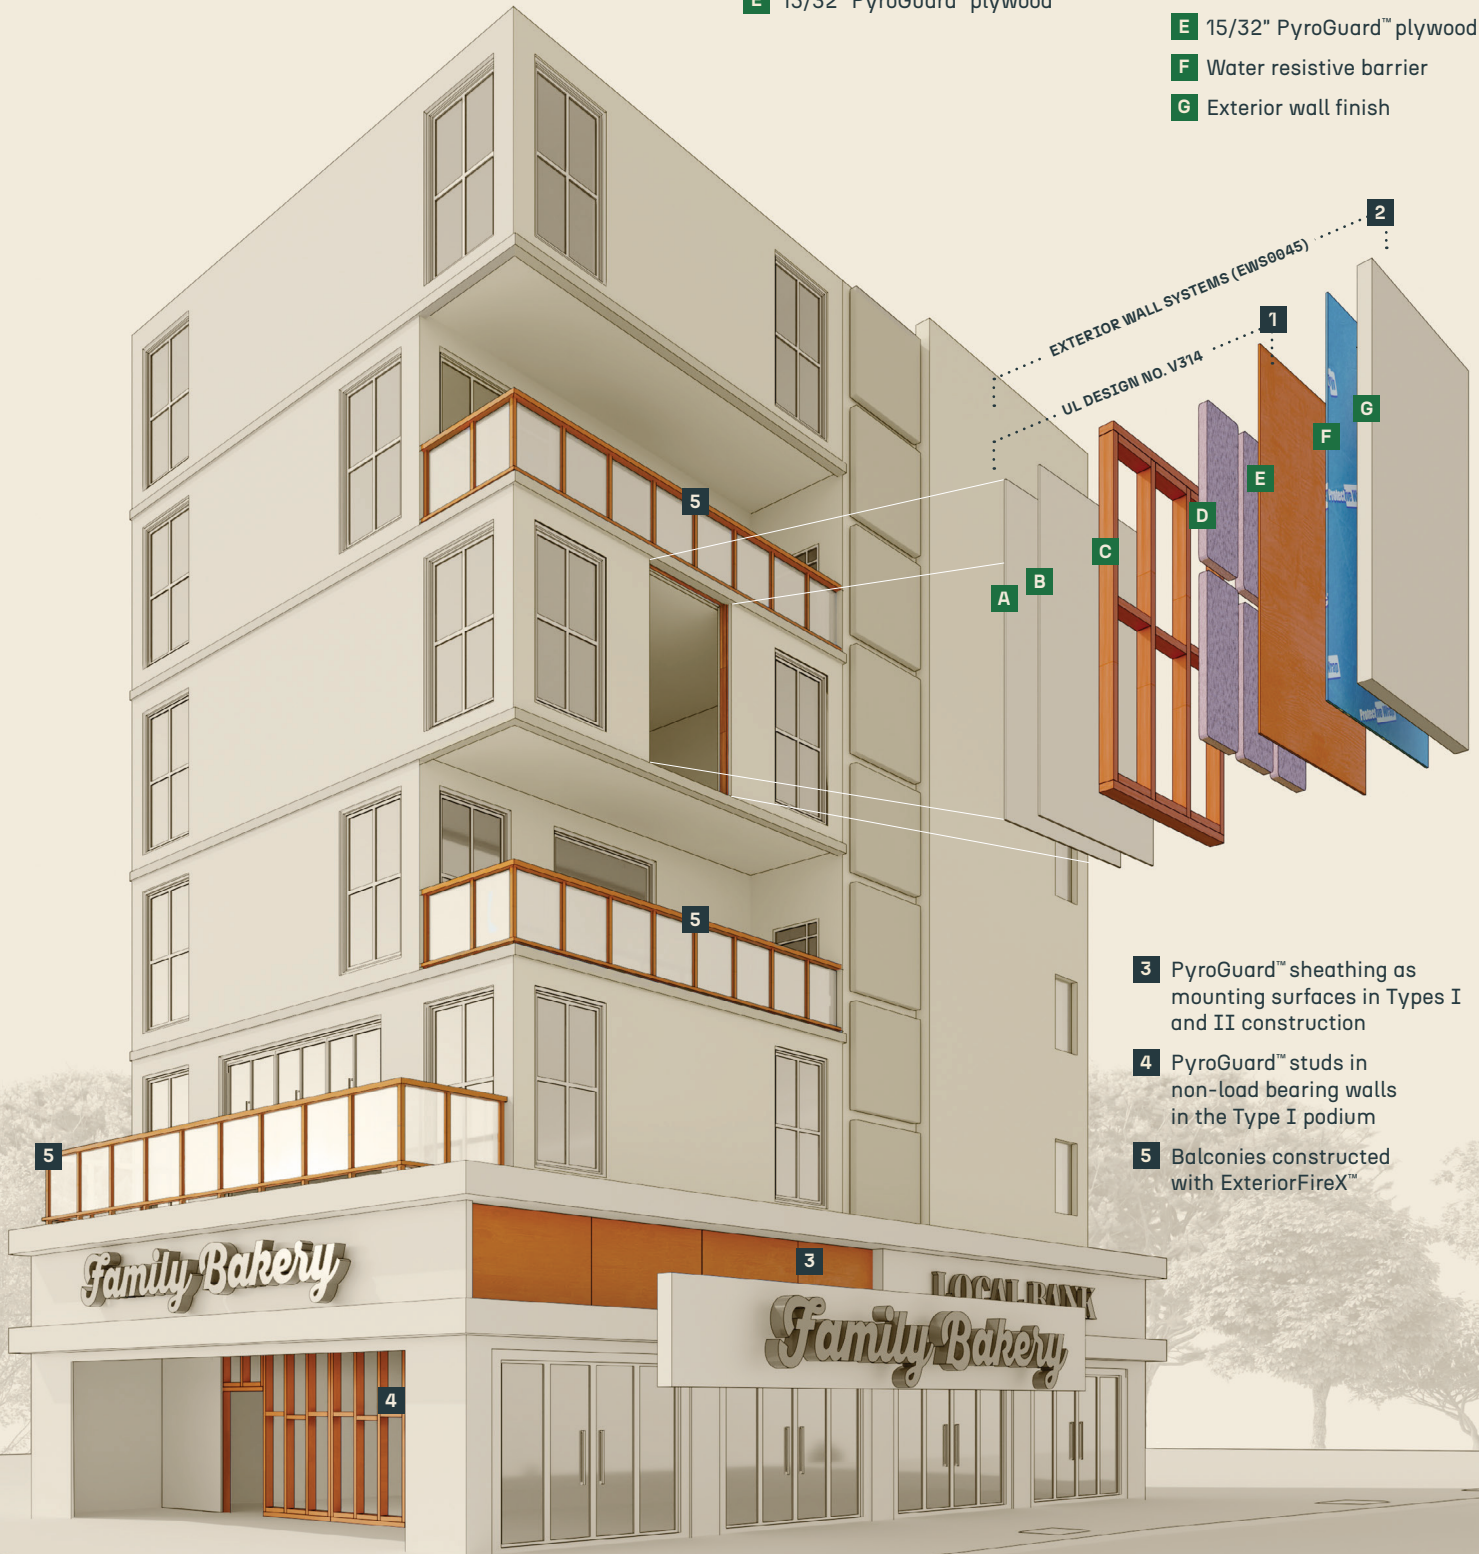

- 3** PyroGuard™ sheathing as mounting surfaces in Types I and II construction
- 4** PyroGuard™ studs in non-load bearing walls in the Type I podium
- 5** Balconies constructed with ExteriorFireX™



# PyroGuard™

## Key Properties

---

- IBC 2303.2 Compliant
- UL Code Report ER7002-01
- UL 3rd Party Audited
- UL GreenGuard Gold
- Exposure 1 Bond Durability Plywood
- MIL-L-19140E Spec Listed

### Warranty QR CODE



## Key Applications

---

- Weather Protected
- Type III Exterior Walls
- Server Room
- Blocking
- Nailing Surface
- Parapet Walls
- Type II Roofing
- Trusses
- LVL

---

# PRESSURE TREATED. **PRESSURE TESTED.**

IBC 2303.2.2 "The use of paints, coating, stains or other surface treatments is not an approved method of protection as required in this section."

---

# ExteriorFireX™

## Key Properties

---

- IBC 2303.2 Compliant
- UL 3rd Party Audited
- ASTM D2898
- WUI Compliant
- Requires Paint or Stain

## Key Applications

---

- Weather Exposed
- Above Ground
- Decking
- Railing
- Canopies
- Soffit / Fascia