


USES OF FIRE-RETARDANT-TREATED WOOD	IBC 2015 ed.	NFPA 5000 2015 ed.	NFPA 101 2015 ed.
Architectural trim, exterior wall coverings	1406.2.1#3	37.2.1	NFPA 101 is an exits code. Use a building code column.
Awnings & canopies	3105.3	32.4.2.1(3)	
Balconies and similar appendages	1406.3	37.2.2.2	
Bay and oriel windows	1406.4	37.2.2.1	
Children playground structures in malls.	424.2#1		
Combustible projections	705.2.3	37.2	
Exterior bearing & nonbearing walls: Type III const.	602.3	7.2.4.2.1	4.4.2.1 ¹
Exterior bearing & nonbearing walls: Type IV const.	602.4.1	7.2.5.6.7	4.5.6.7 ¹
Exterior nonbearing walls in Type I & Type II const.	603.1#1.2	7.2.3.2.12.1	4.3.2.12.1 ¹
Enclosed combustible spaces in sprinklered buildings of all types of construction: Sprinklers not required	NFPA 13 1999 ed. 8-13.1.1#9; 2002 ed. 8.14.1.2.11; 2007, 2010, 2013, 2016 ed. 8.15.1.2.11		
Fire barrier: see interior partitions Type I & II const.	603.1#1.1	7.2.3.2.11.2	4.3.2.11.2 ¹
Fuel dispensing station (marine and motor vehicle)	406.7.2	32.4.5.2	See building code
Grandstands: allowable heights increased.		32.7.5.4	12.4.8.3.3
Interior finish with flame spread index ≤ 25 (Class A)	803.1.1	10.3.2.1	10.2.3.4(1)
Kiosks in covered and open mall buildings	402.6.2	27.4.4.12.1	36.4.4.8(1)
Liquid storage rooms (shelving, racks and wainscoting)	415.11.5.2#3	NFPA 30 9.3.6	NFPA 30 9.3.6
Parapet not required: FRTW sheathing:			
Exterior Walls	705.11#5.1	37.1.3.1	See building code
Fire and party wall in Type III, IV, and V	706.6#4.3	8.3.3.7.4.2	6.6.4.1 ²
Townhouses: exterior and common wall use within 4 ft. of such walls	International Residential Code	22.5.4	See building code
	R302.2.2		
Partitions (2hr. or less) in Type I & II construction	603.1#1.1	7.2.3.2.11.2	4.3.2.11.2 ¹
Partitions (fixed) establishing corridors in building with one tenant serving no more than 30 people	603.1#11	7.2.3.2.11.2	See building code
Pedestrian walkways	3104.3#2	7.2.3.2.9.2	
Platforms in Type I, II and IV construction	410.4	7.2.3.2.7	4.3.2.7 ¹
Plenums in all types of construction	International Mechanical Code	7.2.3.2.14.2	NFPA 220
	602.2.1		4.3.2.15.1
Ramps			7.2.5.4.1(3)
Roof Construction in Type I and Type II building	603.1#1.3	7.2.3.2.9.2	4.3.2.9.2 ¹
Roof construction in Type I, II, III, & VA when >20 ft. above floor	Table 601 note b	7.2.3.2.8 (Type I&II)	4.3.2.9.1 ¹ (Type I&II)
Rooftop structures (penthouses)	1510.2.5		See building code
Shakes and Shingles: wood	1505.6	38.3.2	
Scenery and stage properties (new construction)			12.4.6.11.3
Scenery and stage properties (existing construction)			13.4.6.11.3
Wood veneer	1405.5.1		See building code
Walls and ceiling furred & dropped more than 1-¾ ”	803.13.2.1		

¹NFPA 220


²NFPA 221

Look for this information on all FRTW labels

Exterior

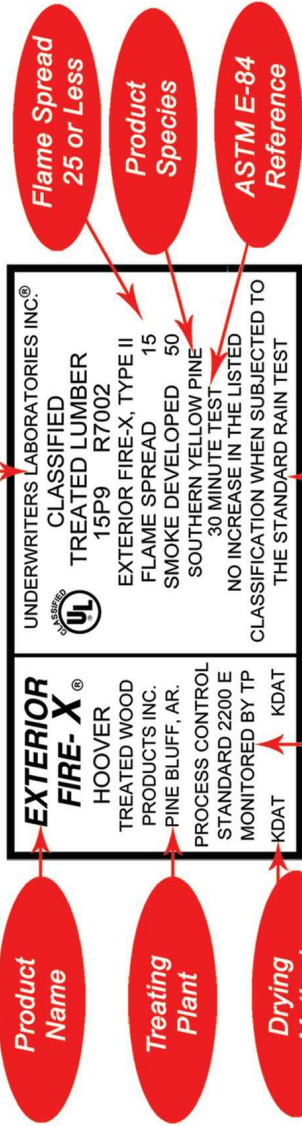

Interior

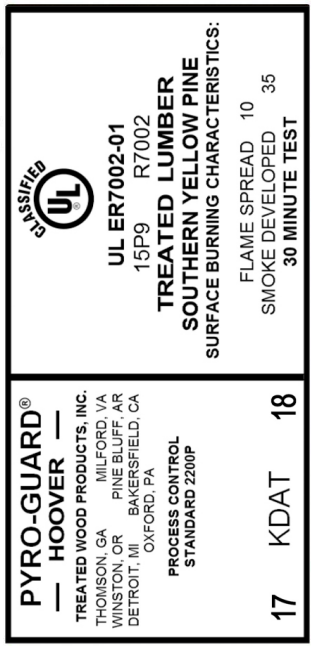

* Only required for exterior FRTW

Code compliant stamps must contain this information.
Product coloration is not a substitute for a building code approved, third-party inspection agency label.

For additional copies of this informational card please contact our Technical Department

Phone: 800-TEC-WOOD (832-9663)
Website: www.FRTW.com
Email: tecwood@frfw.com
Seminars: www.learnaboutfrfw.com

